

Round 5 results — Run fc3-qrel-hidden submitted from fcavalier




Run Description

Find docids not in the round 1-4 judgment file that have titles, authors, and/or s2\_id which match previously judged documents under different docids. Result is 172 rows per topic on average. (There are fewer than 1000 rows on purpose.) The topics 46-50 are new for round 5, and since there are no published previous judgments, the submission has just one dummy result each for them, per the requirements.


Summary Statistics	
Run ID	fc3-qrel-hidden
Topic type	manual
Contributed to judgment sets?	yes

Overall measures	
Number of topics	50
Total number retrieved	7659
Total relevant	10910
Total relevant retrieved	1586
MAP	0.0869
Mean Bpref	0.1539
Mean NDCG@20	0.4770
Mean RBP(p=0.5)	0.5707 +0.0122

Document Level Averages	
	Precision
At 5 docs	0.6640
At 10 docs	0.6340
At 15 docs	0.5627
At 20 docs	0.4970
At 30 docs	0.4340
R-Precision	
Exact	0.1480

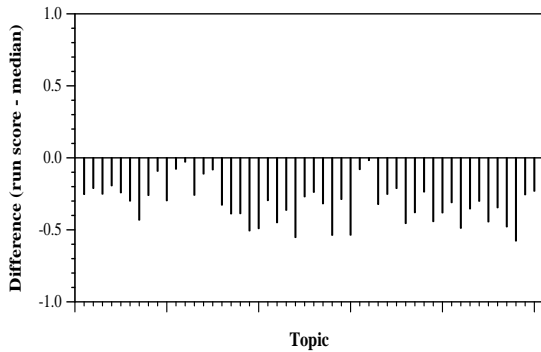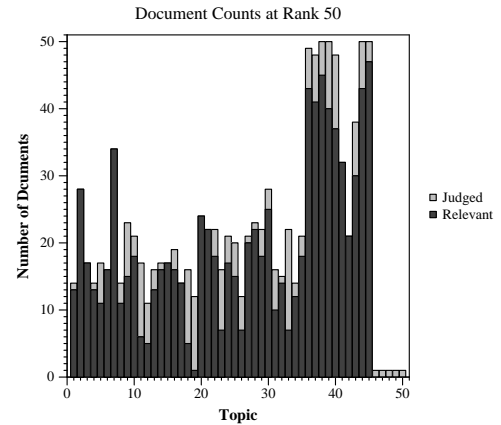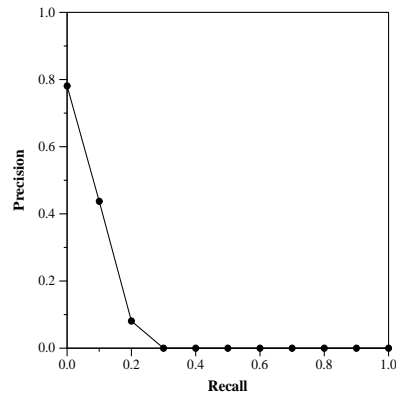


Per-topic difference from median bpref for all Round 4 runs

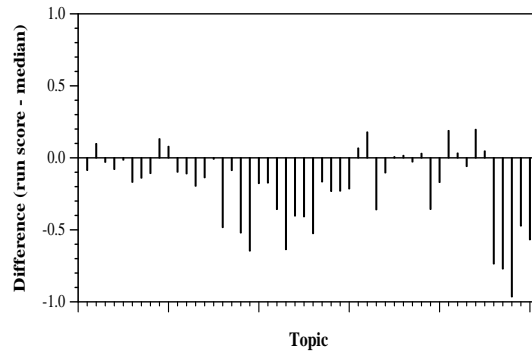


Per-topic difference from median NDCG@20 for all Round 4 runs

Round 5 results — Run fc3-qrel-hidden submitted from fcavalier

---

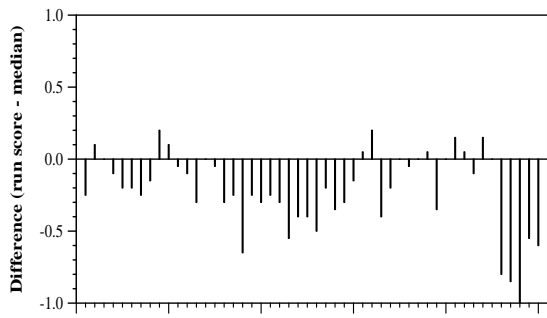

Topic  
Per-topic difference from median P@20 for all Round 4 runs

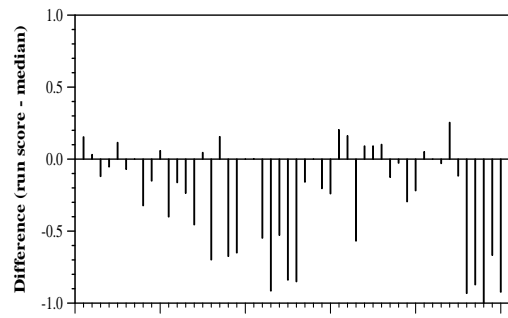

Topic  
Per-topic difference from median RBP(p=0.5) for all Round 4 runs